

TECHNICAL GUIDE &

PARTS CATALOGUE

Cal.VJ12B Cal.VJ14B

ANALOGUE QUARTZ

SII Products



PARTS CATALOGUE / TECHNICAL GUIDE

VJ12B VJ14B


[SPECIFICA	ATION1		Version-0	
Item	Cal. No.	VJ12B	VJ14B	
Movement				
Movement size	Outside diameter	φ20.00 mm 18.20 mm : between 12 o'clock and 6 o'clock sides 18.00 mm : between 3 o'clock and 9 o'clock sides		
	Casing diameter	φ19.40 mm 17.00 mm : between 12 o'clock and 6 o'clock sides		
	Total height	2.71 mm (including the battery)		
Time indication		3 Hands Calendar	2 Hands Calendar	
Driving System		Step motor (Load compensated driving pulse system type)		
Additional mechanism		Electronic circuit reset switch Second setting device Date setting	Electronic circuit reset switch Date setting	
Loss/Gain (Monthly rate) Frequency of crystal oscillator		Less than ±20seconds at normal temperature range 32,768 Hz		
Operational temperature range		- 5°C ∼ + 50°C		
Regulation system		Nil		
Measuring gate by quartz tester		Use 10-second gate * Set the winding stem with crown at the normal position		
Battery		SR621SW (Silver oxide battery) Battery life is approximately 3 years		
Jewels		0 Jewel		





Lubricating : Types of oil |Oil quantity \rightarrow (28) Disassembling procedures Figs. (1) NORMAL QUANTITY Moebius 9010 Reassembling procedures Figs. (28) Moebius 9030 *Refer to the 4pages for the each parts code 1) Hour , minute and second hands 2 Dial 3) 0808 044 Date dial guard 4) Date dial * 5) 0810 890 Date jumper 6) 0273 021 Hour wheel 7) 0802 030 Date driving wheel



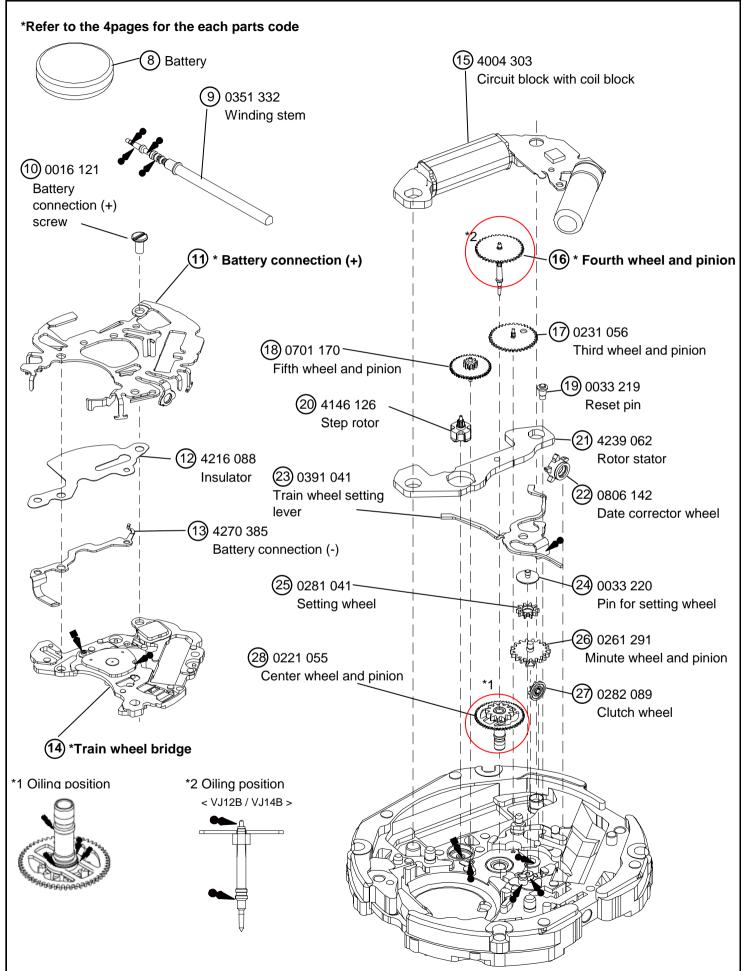



PARTS CATALOGUE

Remarks:

4 Date dial (standard type)

Part code	Positing of crown	Positing of date frame	Color of figure	Color of background
0878 395	3H	3H	Black	White
0878 396	3H	ЗН	White	Black
0878 397	3H	6H	Black	White
0878 398	3Н	6H	White	Black

O The part which is not common in Cal.VJ1*B

Parts name	VJ12B	VJ14B
11) Battery connection(+)	4268 023	4268 028
14 Train wheel bridge	0125 297	0125 297
16 Fourth wheel and pinion	0144 097	0144 088

^{*}All parts code are subject to change without notice.




TECHNICAL GUIDE

The explanation here is only for the particular points of Cal.VJ12 / VJ14

I . STRUCTURE OF THE CIRCUIT BLOCK

Notes: Since the circuit block and coil block are made by one piece, in disassembling and reassembling take care not to cut the coil line.

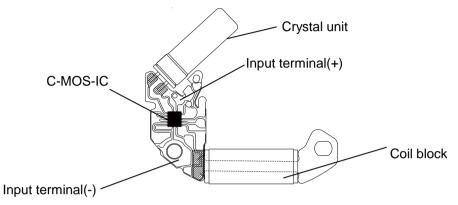


II. REMARKS ON DISASSEMBLING AND REASSEMBLING

1 Hands

How to install


Place the movement directly on a flat metal plate or the like to install the hands.

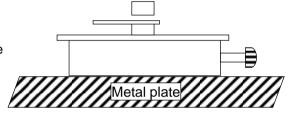

2 Date dial guard

The date dial guard has three protrusions to be caught under the main plate, and it is also fixed by two guide pins.


- ·How to remove
- Lightly lift the A portion of the date dial guard with tweezers to release it from the guide pin, and then move it in the clockwise direction until it gets off the guide pin.
- Release the B portion of the date dial guard in the same way as described above, and then move it in the clockwise direction until gets off the guide pin.
- Check that all the three protrusions of the date dial guard have come off from the main plate, and then remove the date dial guard.

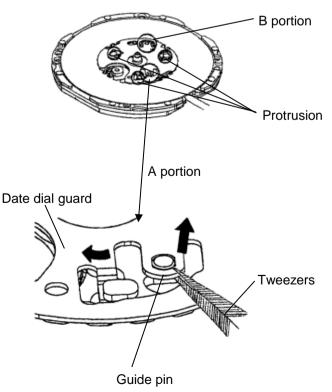







- · How to install
 - 1) Put the date dial guard on the main plate so that the A and B portion are over the guide pins, as shown in the illustration at right.
 - 2) Move the protrusion D of the date dial guard in the counterclockwise direction so that it is caught under the main plate.
 - 3) Slightly move the protrusions C and E in the counterclockwise direction alternately to set them under the main plate. Then, set the A and B portions of the date dial guard to the guide pins.
 - 4) Check that the date dial guard is fixed securely to the main plate.

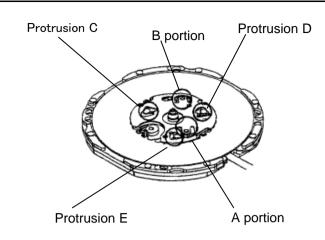

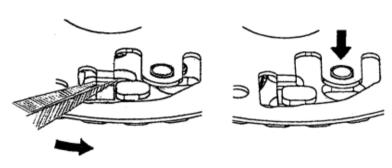

- (3) Battery
 - ·How to install battery

Insert the Battery aslant in the direction shown by the arrow. Check the Battery connection (+) securely touches the side face of the Battery.

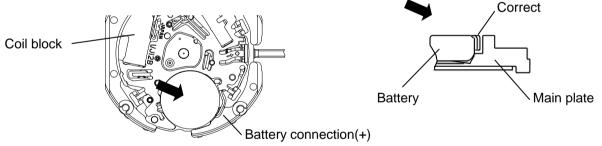


- (4) Battery connection (+)
 - · How to install

Have the hook portions (3 places) catch the main plate (Fig.1 & Fig.2).

In disassembling and reassembling, take care not to deform the hook portion.

After installing the Battery connection (+), check that the three hook portions securely catch the main plate.

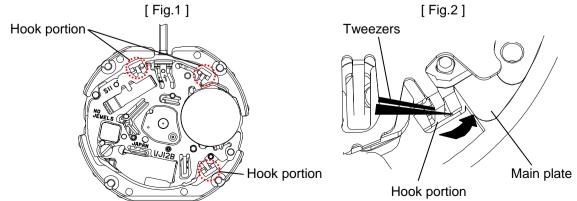




TECHNICAL GUIDE


- (5) Insulator
 - Setting position

Notes: To Insulate between the Battery connection (+) and the Battery connection (-), Insulator should be put at the three pin securely as bellow.

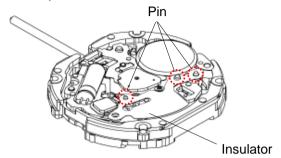

- (6) Train wheel bridge
 - Setting position


Notes: Since the fifth wheel and pinion and step rotor are made of plastics, take care not to damage them in disassembling and reassembling.

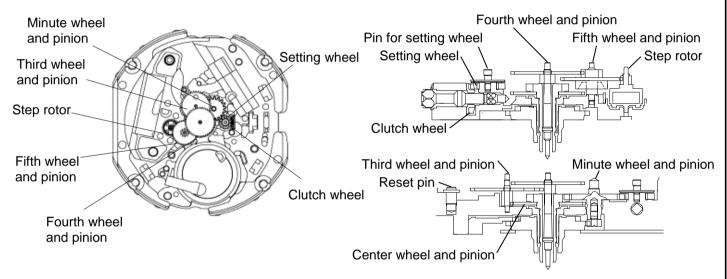

- (7) Train wheel setting lever
 - Setting position

Notes:

- •Catch the part of spring of the Train wheel setting lever to the pin like as below.
- •Take care not to deform the spring potion of the Train wheel setting lever.

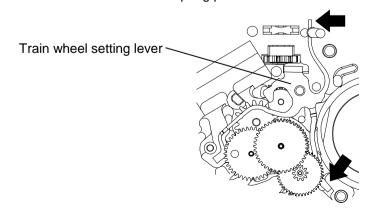



TECHNICAL GUIDE


(8) Pin for setting wheel

Notes:

In disassembling and reassembling, take care not to damage the portion that is assembled of the pin. (Since the portion that is assembled of the pin is made of plastics and easily damaged.)

In disassembling,

pick the pin up main plate to vertical direction with care.

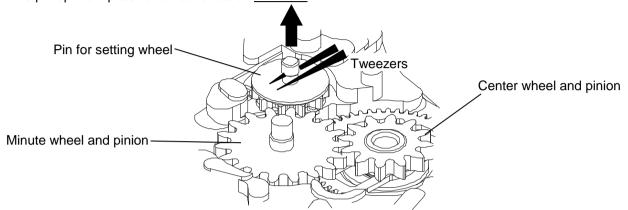

In reassembling,

push the pin in main plate to vertical direction with care.

