

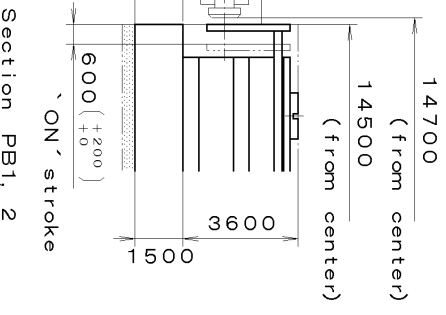


DH1~DH2=25816 (±20)
Stroke for PB must be minimum 600 [$+200$] μm

Coordinates			
Mark	X	Y	R
GM	0	0	
DH1	3000	13000	
DH2	2100	-12800	
a1	3441	14908	430
a2	1865	15186	430
a3	-15151	2129	430
a4	-15291	535	430
a5	10434	-11190	430
a6	9208	-12219	430

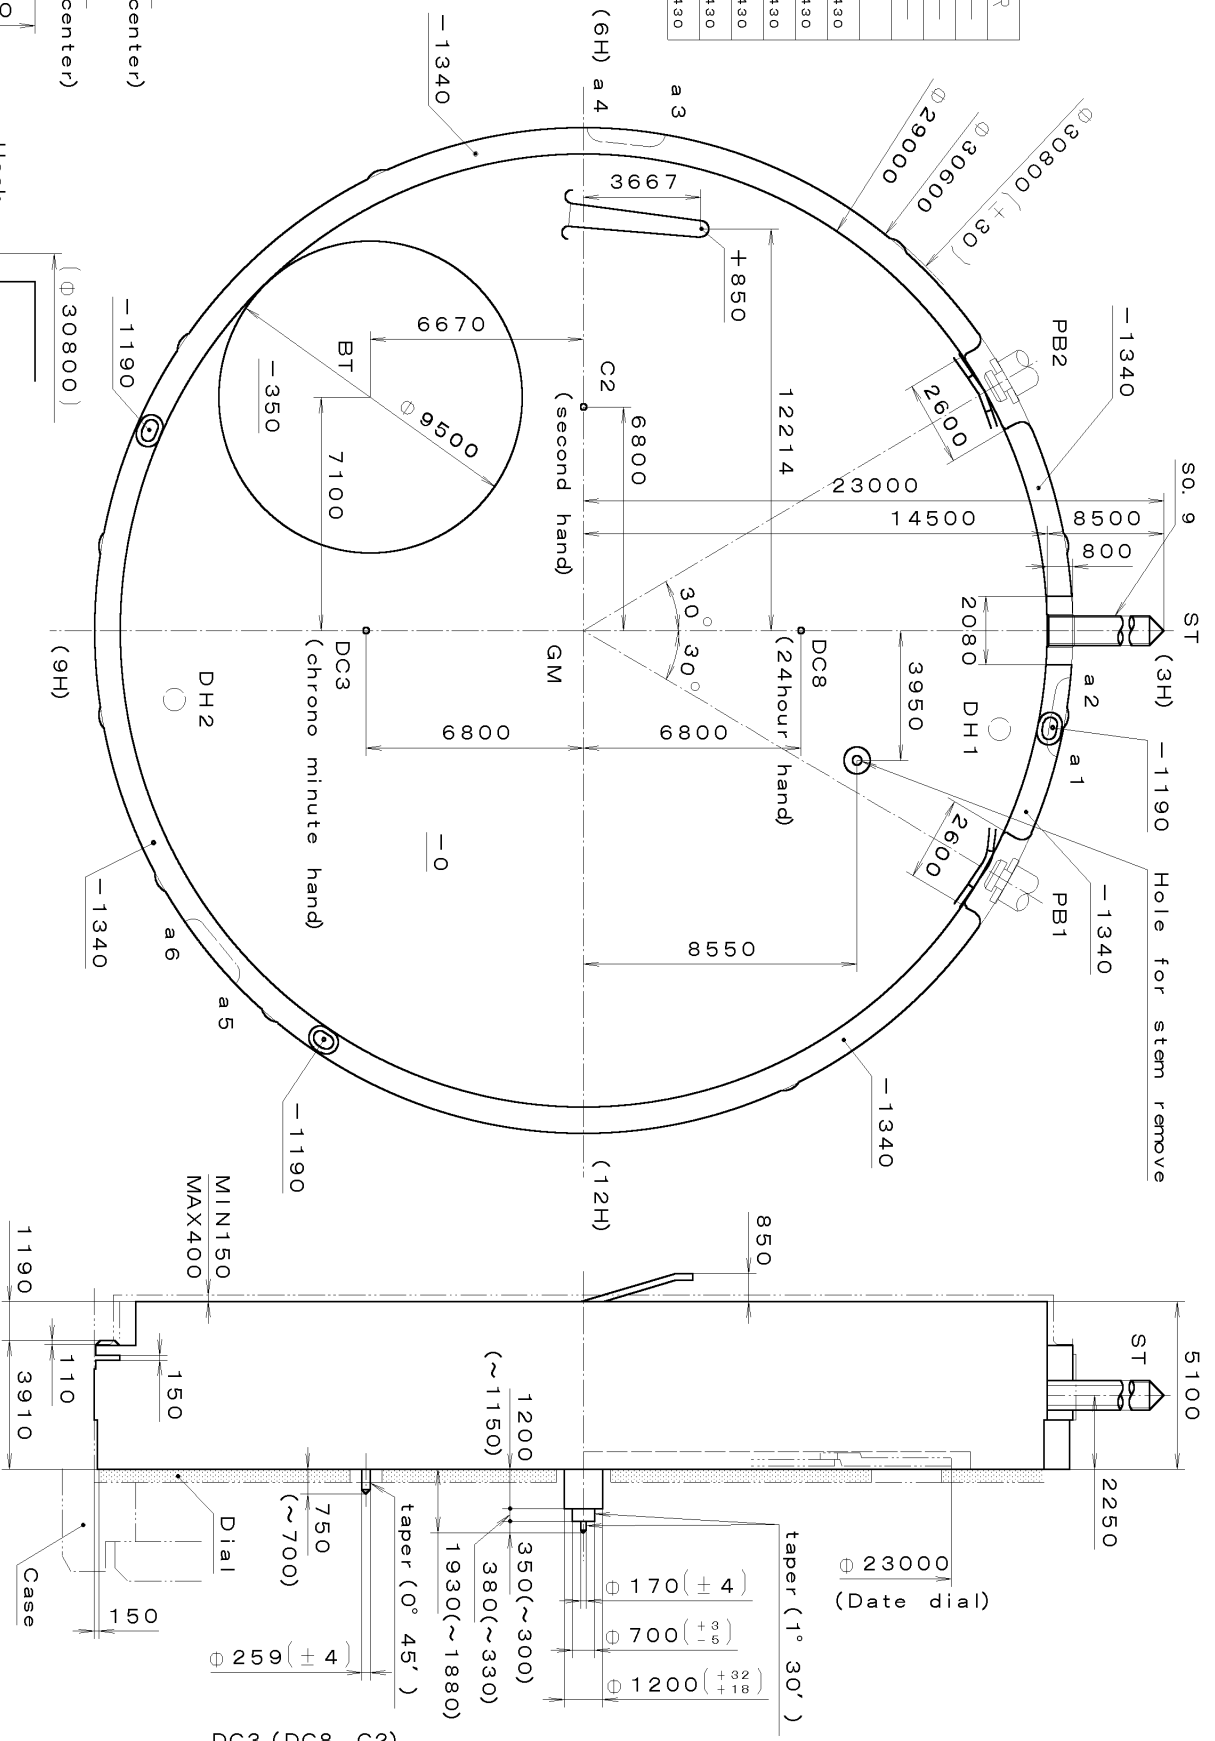

Quantity	Unit	Cal. No. :
△	1/1000 mm	0S20
△	Scale	6:1
△	Date	
△	Drawn	
△	Checked	T. Hiruta
△	Approved	



Material	General Tolerances
Heat Treatment	Dimensions
Hardness	Angles
Plating	

Name :	Parts :
Frame for Case	

Drawing No. : 0S20C000

MIYOTA


This drawing is provisional and subject to our reconfirmation and/or revision without notice.

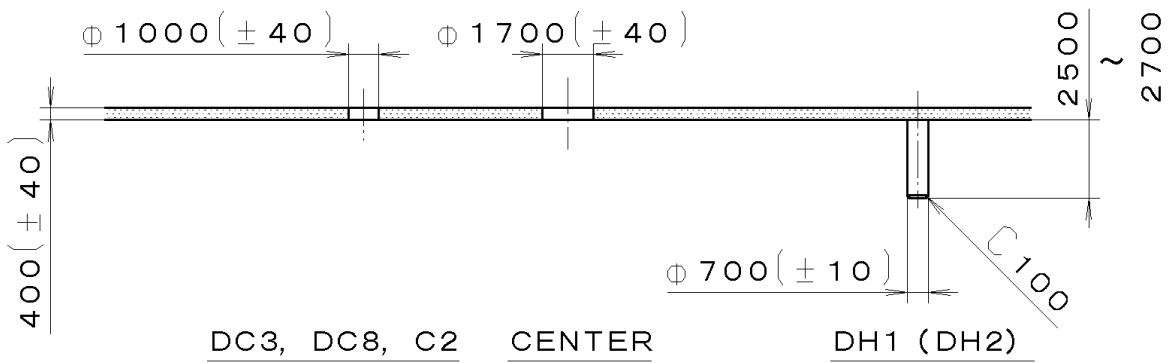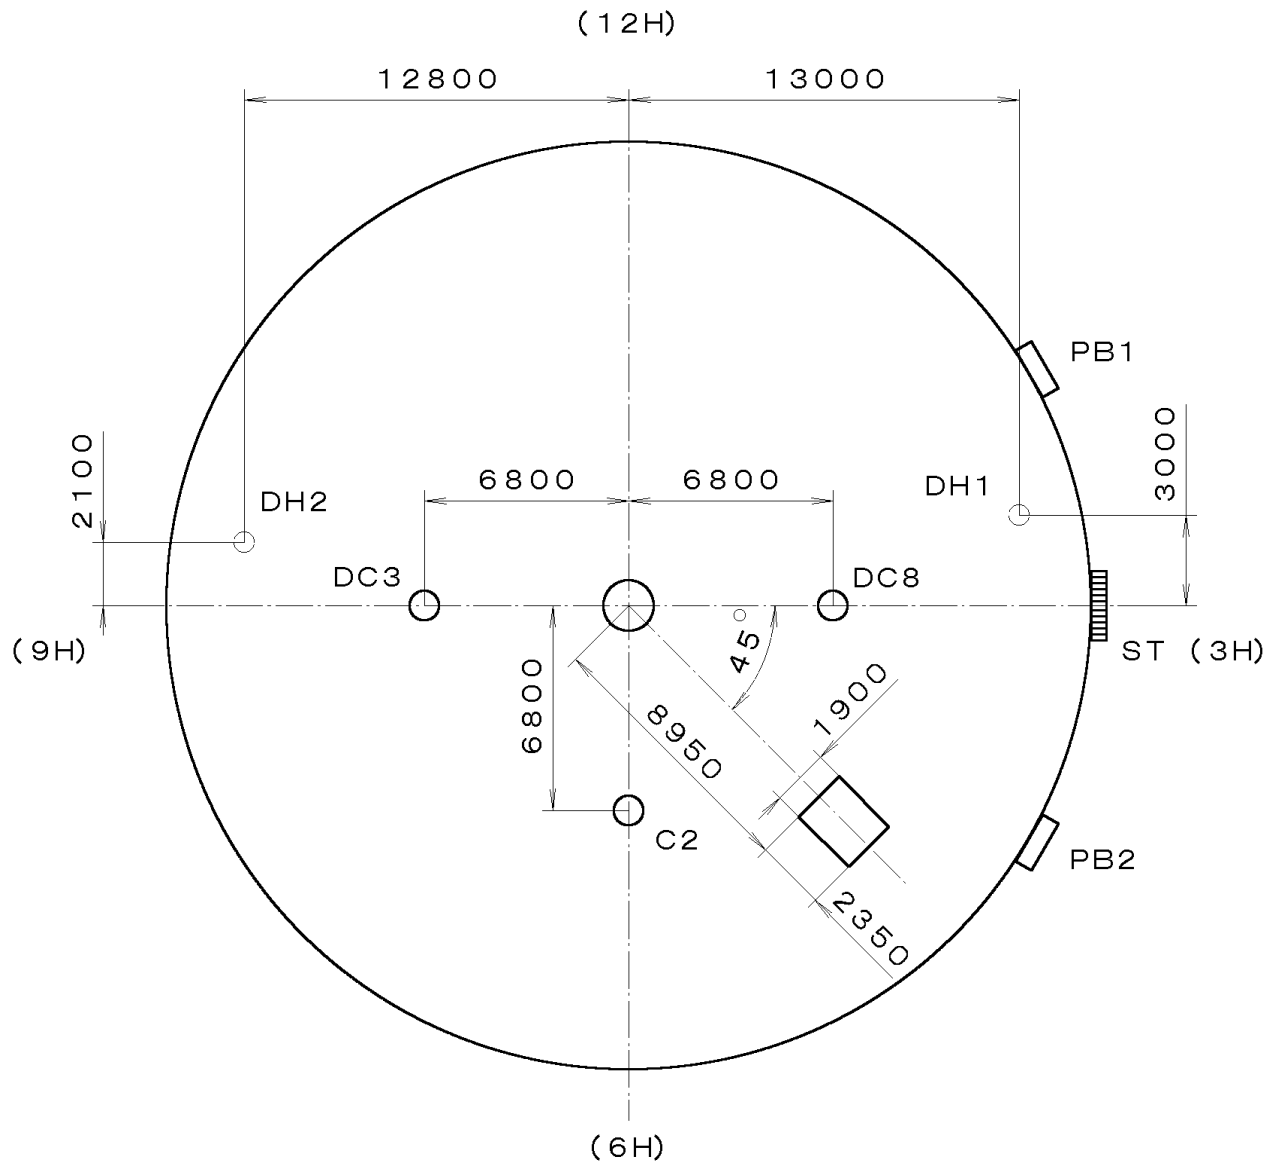

*** T I P W OS20-00A (01) *** (2100 1121) 01-01-80

7		Quantity		Cal. No. :	OS20-00A
6		Unit	1/1000 mm	Parts:	
5		Scale	4:1	Name:	Indications for Dial
4		Date		Drawing No. :	OS20D000
3		Drawn			
2		Checked	T. Hiruta		
1		Approved			
Material					
Heat Treatment		General Tolerances		MIYOTA	
Hardness		Dimensions			
Plating		Angles			

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

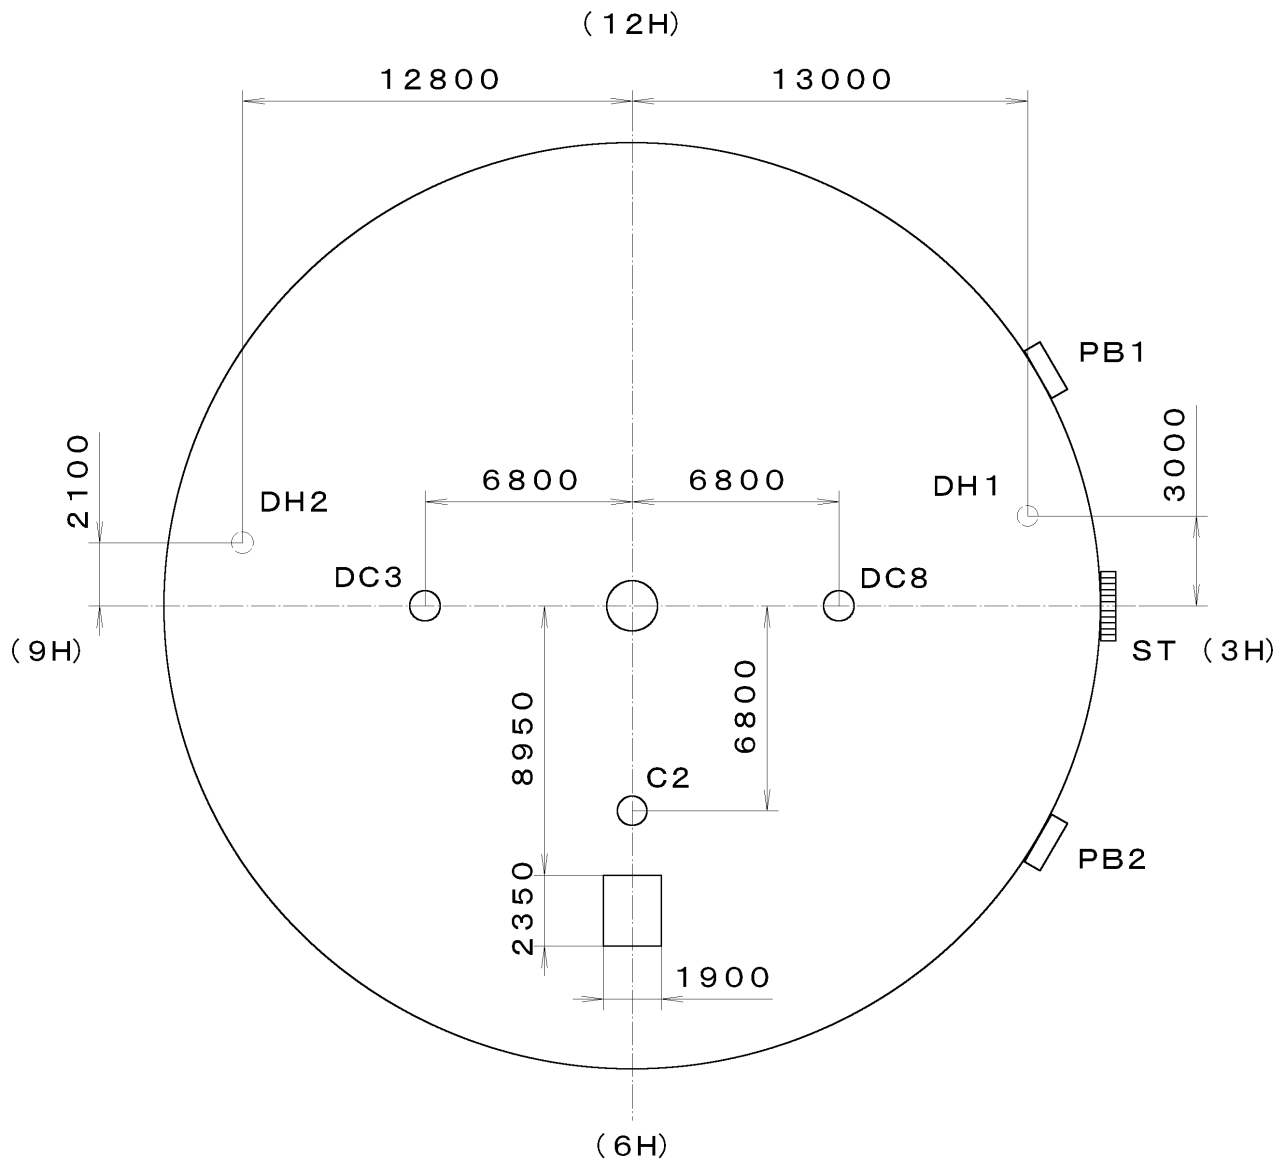


01-12-04

(2100 1121

OS20-00Z

OS20-00Z

*** TIPW

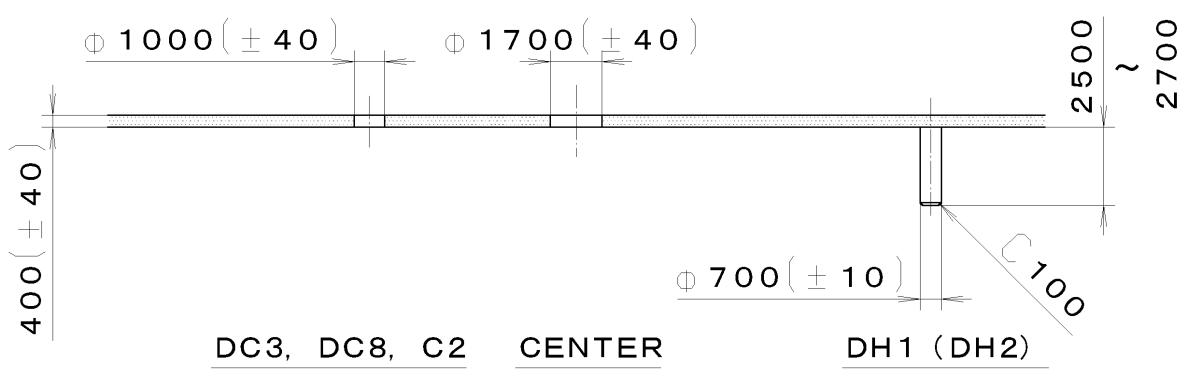


DC3, DC8, C2 CENTER DH1 (DH2)

7			Quantity		Cal. No. :	OS20-00Z
6			Unit	1/1000 mm		
5			Scale	4:1	Parts:	Name: Indications for Dial Drawing No. : OS20D010
4			Date			
3			Drawn			
2			Checked	T. Hiruta		
1			Approved			
Material						
Heat Treatment			General Tolerances			
Hardness			Dimensions			
Plating			Angles			


MIYOTA

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-07-05



S0. 9, P=0. 225mm

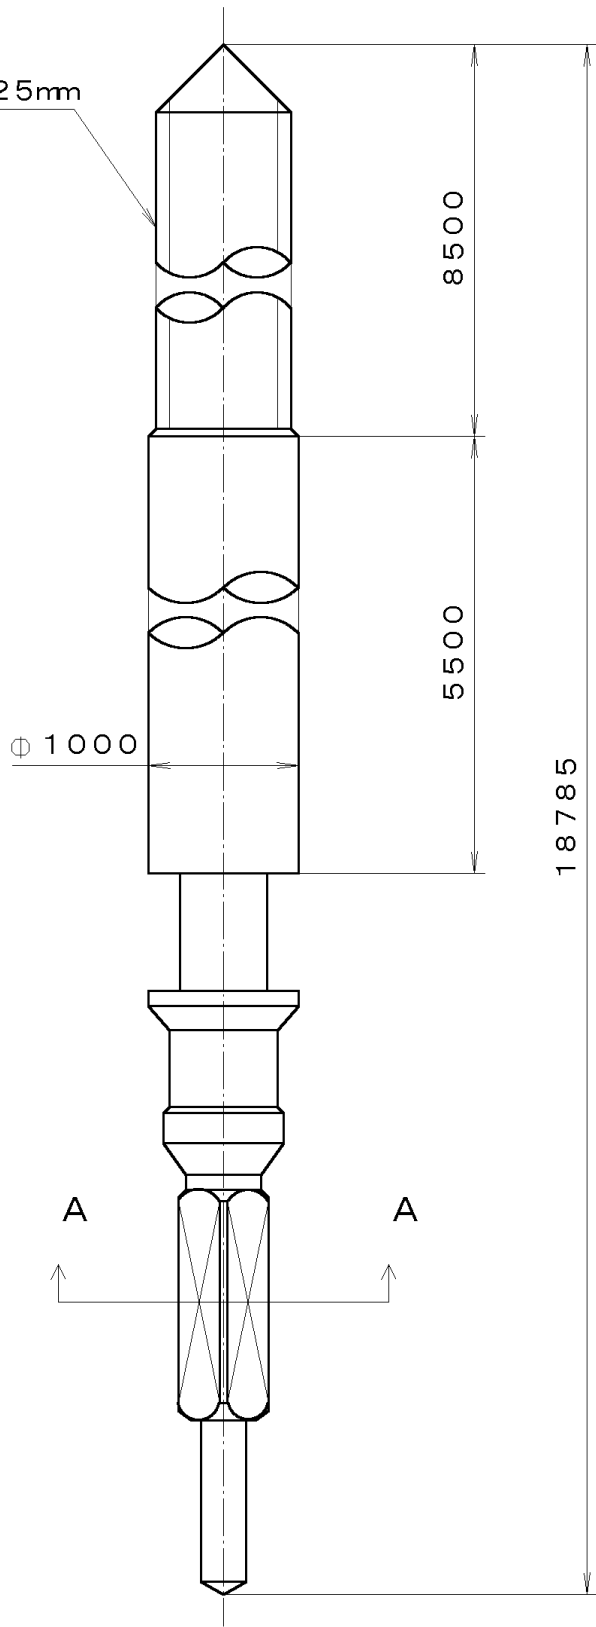

7		Quantity		Cal. No. :
6		Unit	1/1000 mm	Parts:
5		Scale	20:1	
4		Date		Name:
3		Drawn		
2		Checked	T. Hiruta	Drawing No. : 4530S000
1		Approved		
Material				MIYOTA
Heat Treatment		General Tolerances		
Hardness		Dimensions		
Plating		Angles		